COCOROSA
SURFACES

CEMB



OPERA
opus collections



PIEDRA stone collections



MADERA wood collections



OPERA opus collections



FIORA flowery collections



BESPOKE customization

RECREATE THE BEAUTY OF ELEMENTS

Offering sustainable surface solutions with eco-friendly materials developed from the essence of woods, stones and other man-made materials to maintain
the beauty as much as the element where the idea was extracted from.

floor score

ÉMISSIONS DANS L'AIR INTÉRIEUR

A+

A+ A B C



OPERA

opus collections

By definition, an opus is a created work by man, usually of an artistic kind. It is creative and beautiful – a definite work of art to the eye of the beholder.

Cocorosa introduces opus, inspired by man-made materials in the architecture world. Opus tiles provides infinite possibilities to the diserning when it comes to beautiful, modern spaces. Its range of versatile, neutral hues also aims to delight The senses.

COCOROSA
SURFACES

100% Waterproof

Antislip Surfaces

Fire Prevention

Stain Resistant

Realistic Finish

Scratch Resistant

High Impact Resistance

LVT GLUE DOWN

LVT CLICK

LVT LOOSE LAY

LVT SINTERED CORE

SPC RIGID CORE

OPERA CEMB

Ash

CEMB 01





OPERA CEMB

Ash

CEMB 01

100% Waterproof

Antislip Surfaces

Fire Prevention

Stain Resistant

Realistic Finish

Scratch Resistant

High Impact Resistance

LVT GLUE DOWN

LVT CLICK

LVT LOOSE LAY

LVT SINTERED CORE

SPC RIGID CORE

OPERA CEMB Cinder

CEMB 02





100% Waterproof

Antislip Surfaces

Fire Prevention

Stain Resistant

Realistic Finish

Scratch Resistant

High Impact Resistance

LVT GLUE DOWN

LVT CLICK

LVT LOOSE LAY

LVT SINTERED CORE

SPC RIGID CORE

OPERA CEMB Beige

CEMB 03





OPERA CEMB Beige

CEMB 03

100% Waterproof

Antislip Surfaces

Fire Prevention

Stain Resistant

Realistic Finish

Scratch Resistant

High Impact Resistance

LVT GLUE DOWN

LVT CLICK

LVT LOOSE LAY

LVT SINTERED CORE

SPC RIGID CORE

OPERA CEMB

Taupe

CEMB 04





OPERA CEMB

Taupe

CEMB 04

100% Waterproof

Antislip Surfaces

Fire Prevention

Stain Resistant

Realistic Finish

Scratch Resistant

High Impact Resistance

LVT GLUE DOWN

LVT CLICK

LVT LOOSE LAY

LVT SINTERED CORE

SPC RIGID CORE

OPERA CEMB Graphite

CEMB 05





100% Waterproof

Antislip Surfaces

Fire Prevention

Stain Resistant

Realistic Finish

Scratch Resistant

High Impact Resistance

LVT GLUE DOWN

LVT CLICK

LVT LOOSE LAY

LVT SINTERED CORE

SPC RIGID CORE

OPERA CEMB
Oscuro
CEMB 06





OPERA CEMB
Oscuro
CEMB 06

OPERA CEMB
Ash CEMB 01

OPERA CEMB
Cinder CEMB 02

OPERA CEMB
Beige CEMB 03



OPERA CEMB
Taupe CEMB 04

OPERA CEMB
Graphite CEMB 05

OPERA CEMB
Oscuro CEMB 06

SPECIAL PIECES

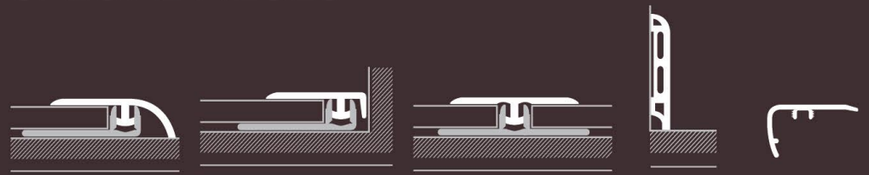

END PROFILE
(REDUCER)

END PROFILE WALL
(END CAP)

TRANSITION PROFILE
(T-MOULDING)

SKIRTING
(BASEBOARD)

OVERLAP STAIRNOSE

SMART SELECT LUXURY VINYL FLOORING LIMITED WARRANTY PERIODS

Thickness	Core	Wear layer	Attached pad	Residential Warranty	L. Commercial Warranty
3.2 mm	Rigid Core	8 mil (0.2mm)	Y / N	10 years	5 years
3.2 mm	Rigid Core	12 mil (0.3mm)	Y / N	15 years	7 years
4 mm	Rigid Core	12 mil (0.3mm)	Y / N	20 years	8 years
5 mm	Rigid Core	20 mil (0.5mm)	Y / N	Limited Lifetime	10 years

Definitions for applications in terms of LVT

RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL
Kitchen	Small restaurant	Large restaurant
Dining room	Small retail shop	Large retail, large office
Bedroom	Waiting rooms	Hair salon (working area)
Bathroom	Trade booths	School classroom
Recreation rooms, foyers	Small Office	Nurses Station

*Residential use, or household conditions means the daily activities commonly associated with residential use.

*Light commercial is defined as environments which do not have heavy commercial traffic, where the flooring is not exposed to a heavy commercial maintenance schedule and where the interior temperature and humidify can be controlled and maintained.

*Commercial is defined as environments which have heavy commercial traffic.

TECHNICAL SPECIFICATIONS

Clasification	Test Standard	Result
Reaction to fire	EN ISO 9239-1	B fl – s1
Impact Insulation Class	ASTM E492-09	52
Sound Transmission Class	ASTM E90-09	54
Determination the content of formaldehyde	ISO 16000-3	A+
Performance	**Test Standard**	**Result**
Wear resistance	EN660-1	Group T
Residual indentation after static load	EN436	Pass
Dimensional stability and curling after exposure to heat	EN434	Pass
Flexibility	EN435	Pass
Measurement of dynamic coefficient of friction on dry floor surface	E13893	Pass
Slip resistance	DIN 51130	R10
Resilience to chemicals	EN423	Class 0

FORMATS & RANDOMNESS

LVT Click **LVT Sintered Core** **SPC Rigid Core**	**INCHES** **MM** **FACES**	12"X24" 305x610 3	18"X36" * 460X935 2	18"X48" * 460X1220 2	- - -	- - -
LVT Glue Down **LVT Loose Lay**	**INCHES** **MM** **FACES**	12"X24" 304.8X609.6 3	18"X36" * 457.2X914.4 2	18"X18" 457.2X457.2 4	12"X24" 609.6X609.6 4	36"X36" 914.4X914.4 1

* non-standard formats/size, production upon request/order

email info@cocorosasurfaces.com
phone +86 0757 8252 5005

www.cocorosasurfaces.com

COCOROSA
SURFACES